

PELLET PROCESSING SYSTEMS FOR THE PLASTICS INDUSTRY

GALA CRYSTALLIZATION PROCESS TECHNOLOGY


© SEPTEMBER 2010 • GALA INDUSTRIES, INC.

One of the most exciting process developments for the Plastics Industry and specifically for PET polymers has been the recent release of the Direct Crystallization Process. This process avoids the use of expensive precrystallizers and crystallizers prior to taking the PET pellets into the SSP process or other downstream after-treatment processes. The Gala CPT process complements this process and is superior in method of operation.

The goal of the direct crystallization process is twofold. First and foremost is to retain sufficient heat in the pellets to cause the polymer to crystallize without any additional external heat required, which greatly reduces energy consumption. Another goal of direct crystallization is to allow the free flowing pellets to go directly into either packaging or downstream after-treatment processes, such as the SSP process. The ability to go directly to the downstream after-treatment processes is where direct crystallization provides significant energy savings because the pellets have retained a significant amount of internal heat. This internal heat and the subsequent pellet temperature greatly reduce the time and energy needed to affect crystallization.

Gala's direct crystallization process, or CPT process, uses high velocity gas injection to increase the velocity of the water and pellet slurry and to create a water vapor mist that separates the pellets from the water. The vapor mist insulates the pellets from the cooling effect of the water and further enhances the internal heat to crystallize the pellets. Gas injection produces a much lower and safer process water temperature and flow rate. Typically the water temperature does not need to be above 70 degrees Celsius and the process water flow rate need not be increased above standard underwater pelletizing guidelines.

A recent theoretical analysis, done by Bepex Corporation, looked at a 600 t/day PET plant (2 lines each processing equals 12.5 t/h). The analysis compared a plant using strand pelletization, conventional crystallization and SSP to a plant using Gala underwater pelletization and CPT process going directly into the Solid State Polymerization (SSP) Process. The study showed that by using the Gala underwater pelletization and CPT process, the plant could realize approximately a 50% reduction in capital cost and a 30% reduction in energy consumption.

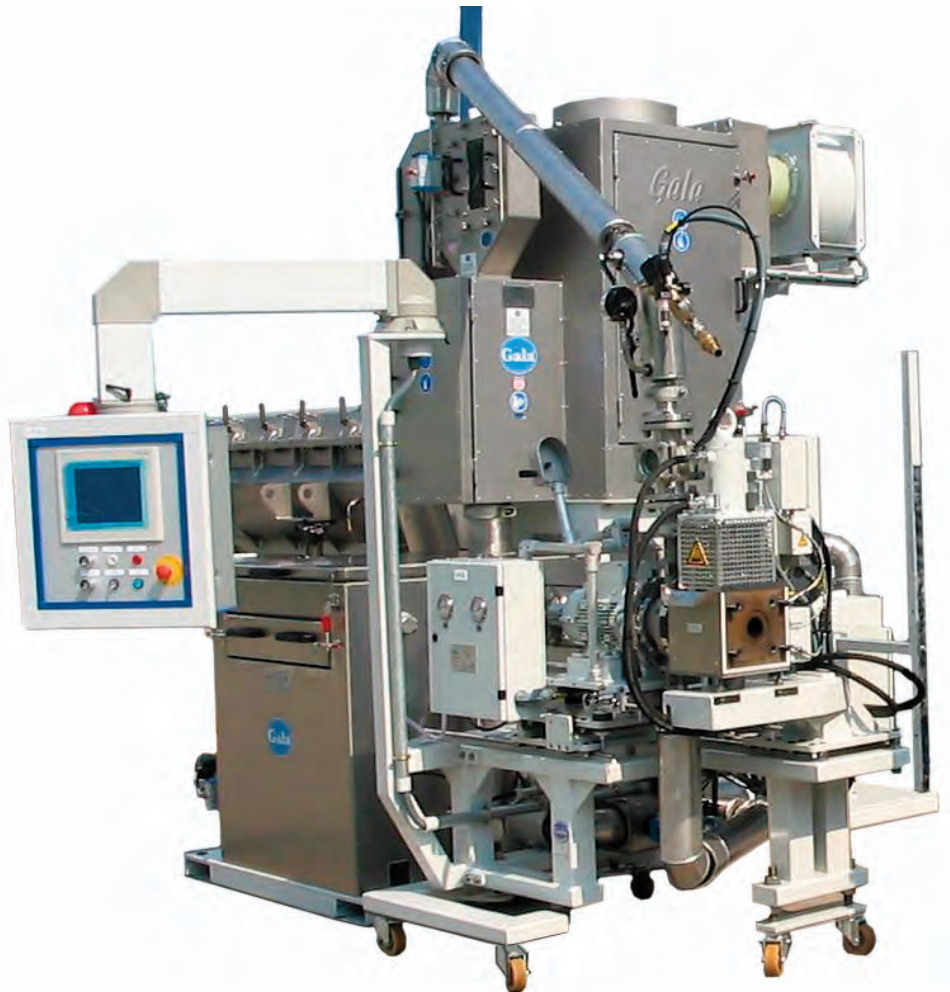

Gala CPT Process System

SAVINGS IN CAPITAL COSTS:

- Elimination of precrystallizer and crystallizer
- Small scope of supply = reduction in installation costs

SAVINGS IN ENERGY COSTS:


- Elimination of precrystallizer and crystallizer
- Reduction in energy to deliver and maintain heat transfer medium
- Utilization of internal pellet heat going into the SSP process




GALA CRYSTALLIZATION PROCESS TECHNOLOGY

If Bepex's theoretical plant ran for 8000 hours per year, the energy savings from using the Gala underwater pelletization and CPT process would equal nearly 1,200,000 Euros in Germany, 6,800,000 RMB in China or \$1,400,000 in the US.

Using direct crystallization processes improves the crystalline structure of the PET pellets. Zimmer AG reported, at the MBS 2005 PET World Congress, on a more uniform crystalline structure and the benefits of such. Conventional crystallizers produce a pellet that is densely packed at the edges but less uniform toward the center. On the other hand, direct crystallization produces a pellet that exhibits more uniform density from pellet edge to the center and shows a 26% reduction in heat of fusion over pellets produced using the conventional crystallization process, saving more energy costs.

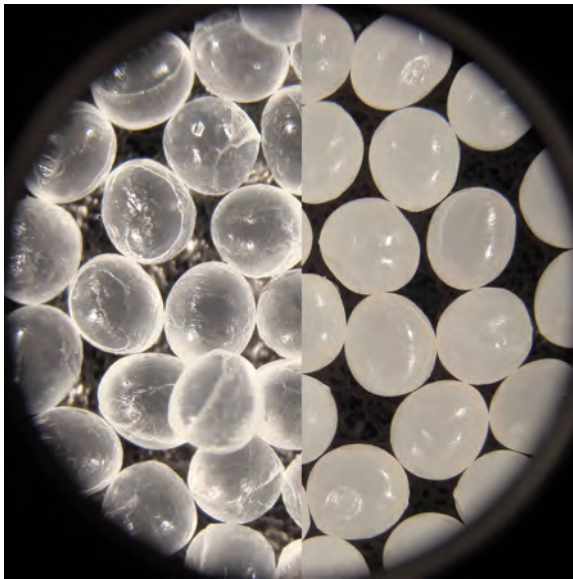

PLA Pellets: amorphous (left) compared to Crystalline (right)

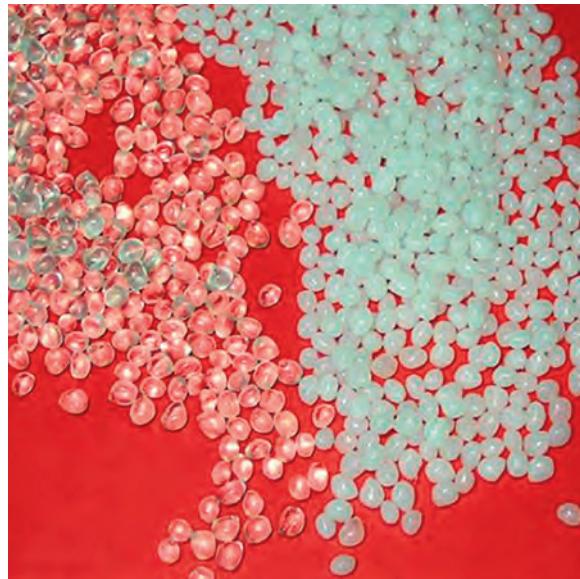

Amorphous pellets (left) compared to Crystalline pellets (right)

- **TECHNOLOGY**
- **INNOVATION**
- **COMMITMENT**
- **SERVICE**



Gala technology is protected, in whole or in part, by one or more issued U.S. and foreign patents, with other domestic and foreign patents pending. Patents include US Patent Nos. 5,265,347; 5,403,176; 5,624,688; 5,638,606; 6,138,375; 6,237,244; 6,332,765; 6,551,087; 6,739,457; 6,793,473; 6,807,748; 6,824,371; 6,925,741; 7,024,794; 7,033,152; 7,157,032; 7,171,762; 7,172,397; 7,267,540; 7,318,719; 7,393,484; 7,402,034; 7,421,802; 7,524,179; and related foreign patents; All logos, trademarks, and service marks (hereafter referred to as "Trademarks") displayed herein whether or not appearing in large print or with or without the trademark symbol are registered and unregistered Trademarks of Gala or of third parties. Gala Trademarks are protected by one or more registered U.S. and foreign trademarks, with other domestic and foreign trademarks pending. All original works of authorship displayed herein is protected under U.S. and other copyright laws. Gala technology may also be protected as trade secrets, mask works or other proprietary rights.

Gala Industries, Inc.

181 Pauley Street, Eagle Rock, VA 24085 USA • Tel: 540 884 2589; Fax: 540 884 2310;
Email: gala@gala-industries.com • www.gala-industries.com



Gala Kunststoff- und Kautschukmaschinen GmbH

Bruchweg 28-30, 46509 Xanten, Germany • Tel: +49 (0) 2801 9800; Fax: +49 (0) 2801 98010
Email: info@gala-europe.de • www.gala-europe.de

Gala Industries Asia Ltd.

Amata City Ind. Est., 9/34 Moo 4, T.Mabyangporn, A. Pluakdeang, Rayong 21140, Thailand
Tel: +66 38 956 245; Fax: +66 38 956 246; www.gala-industries.com